



### Module Series Print & Apply

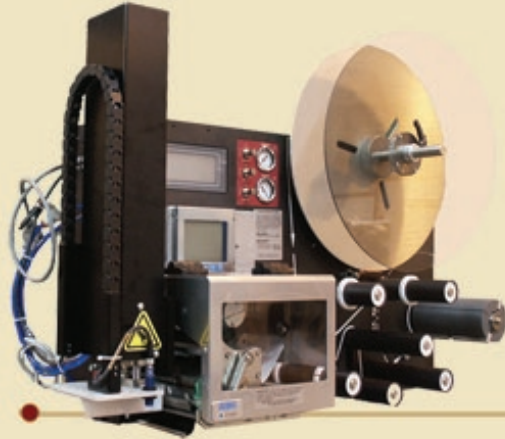

#### Datamax-Based Label Printer Applicators

##### 6300 Series LPAs

- 6300 Module - Datamax A-4212
- 6301 Module - Datamax A-4310
- 6302 Module - Datamax A-4408
- 6303 Module - Datamax A-4606
- 6350 Module - Datamax A-6212
- 6351 Module - Datamax A-6310



#### Get More Production Out of Every Roll

The Module Series come standard with a 16-inch OD label roll and the same unwind/rewind system used in our heavy duty Uniwall Series. This gives you at least 75% more label capacity than the industry-standard 12-inch OD roll.



The series uses a touch screen for displaying prompts and menus. It also provides the flexibility to customize prompts, warnings and menus for specific applications.

A full range of application methods are available utilizing the Module Series design, including Tamp with FOX IV's Touch-Blo feature. Tamp-with-Touch-Blo is available with effective stroke distances to 40 inches. FOX IV's random stroke option automatically adjusts for various labeling distances.

In order to accommodate different label sizes, two options are available: the FOX IV Dual Chamber Applicator (DCA) Pad and removable pads of various sizes. No pad changes are required to go from one label size to another with the DCA Pad option.

#### About FOX IV Technologies

#### Automated Labeling Solutions for more than 25 years

##### SOFTWARE SOLUTIONS

- Label Design
- Custom GUIs
- Smart Printer Applicators (no PC needed)
- WMS Interfacing

##### PRINTER SUPPLIES

- Direct-Thermal & Transfer Labels
- Synthetic Label & Tag Stock
- 8-Color Custom Printing
- Fan-Folding Available
- Standard & Specialty Ribbons

##### TRAINING & SUPPORT

- PMMI-Certified Trainers
- 24/7 Technical Support
- Advanced Certified Training
- On-site Training


##### MATERIAL HANDLING

- Conveyors
- Reject Stations
- Product Flow Control
- Product Spacing & Alignment

##### INTERFACING

- Scales
- PLCs
- Bar Code Scanners
- Computer Systems


## Module Series Print & Apply

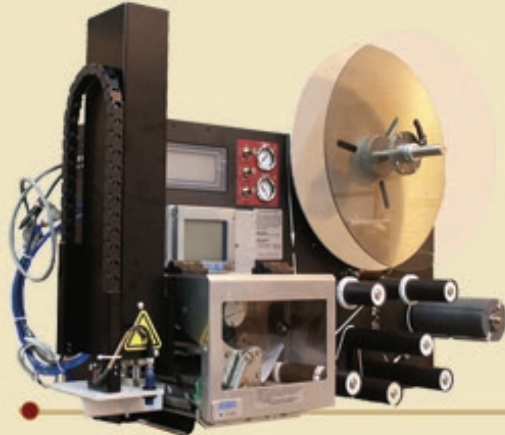

### Datamax-Based Label Printer Applicators

#### 6300 Series LPAs

- 6300 Module - Datamax A-4212
- 6301 Module - Datamax A-4310
- 6302 Module - Datamax A-4408
- 6303 Module - Datamax A-4606
- 6350 Module - Datamax A-6212
- 6351 Module - Datamax A-6310

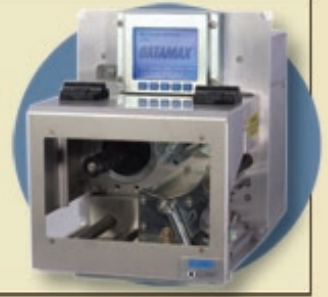

### Printer Specifications

	A-4212	A-4310	A-4408	A-4606***	A-6212	A-6310
<b>RESOLUTION (dpi)</b>	203	300	406	600	203	300
<b>MAX PRINT WIDTH (in)</b>	4.094	4.161	4.094	4.157	6.610	6.401
<b>NOM PRINT HEAD DOT SIZE (in x in)</b>	.0043 x .005	.0027 x .004	.0013 x .0018	.0008 x .0015	.0043 x .0052	.0027 x .0043
<b>PRINT SPEED (in/sec)</b>	2 - 12	2 - 10	2 - 8	2 - 6	2 - 12	2 - 10
<b>MEDIA WIDTH RANGE (in)</b>	1 - 4.65	1 - 4.65	1 - 4.65	1 - 4.65	2 - 6.70	2 - 6.70
<b>RIBBON WIDTH RANGE (in)</b>	1 - 4.65	1 - 4.65	1 - 4.65	1 - 4.65	2 - 6.70	2 - 6.70
<b>MEDIA EDGE TO PRINTHEAD DOT 1, LH MODEL (in)</b>	.070	.000	.070	.000	.000	.054
<b>MEDIA EDGE TO PRINTHEAD DOT 1, RH MODEL (in)</b>	.070	.070	.070	.070	.070	.070
<b>MEDIA CORE ID RANGE (in)</b>				N/A, External Supply		
<b>MAX MEDIA ROLL OD* (in)</b>				N/A, External Supply		
<b>MAX RIBBON LENGTH** (ft)</b>				1968		
<b>MEDIA THICKNESS RANGE (in)</b>				.0025 - .010		
<b>PRINT LENGTH RANGE (in)</b>				.25 - 99		

	A-4212	A-4310	A-4408	A-4606***	A-6212	A-6310
<b>RESOLUTION (dppm)</b>	8.0	11.8	16.0	23.6	8.0	11.8
<b>MAX PRINT WIDTH (mm)</b>	104.0	105.7	104.0	105.6	167.9	162.6
<b>NOM PRINT HEAD DOT SIZE (mm x mm)</b>	.11 x .13	.07 x .11	.05 x .07	.03 x .06	.11 x .13	.07 x .11
<b>PRINT SPEED (mm/sec)</b>	50 - 304	50 - 254	50 - 203	50 - 152	50 - 304	50 - 254
<b>MEDIA WIDTH RANGE (mm)</b>	25 - 118	25 - 118	25 - 118	25 - 118	50 - 170	50 - 170
<b>RIBBON WIDTH RANGE (mm)</b>	25 - 118	25 - 118	25 - 118	25 - 118	50 - 170	50 - 170
<b>MEDIA EDGE TO PRINTHEAD DOT 1, LH MODEL (mm)</b>	1.78	.000	1.78	.000	.000	1.37
<b>MEDIA EDGE TO PRINTHEAD DOT 1, RH MODEL (mm)</b>	1.78	1.78	1.78	1.78	1.78	1.78
<b>MEDIA CORE ID RANGE (mm)</b>				N/A, External Supply		
<b>MAX MEDIA ROLL OD* (mm)</b>				N/A, External Supply		
<b>MAX RIBBON LENGTH** (M)</b>				600		
<b>MEDIA THICKNESS RANGE (mm)</b>				.06 - .25		
<b>PRINT LENGTH RANGE (mm)</b>				6 - 2500		

\*Labels wound out only    \*\* Coated side in only    \*\*\*The A-4606 is only available as a custom order. Contact your Datamax representative for lead times.



#### DATAMAX A-CLASS OPTIONS:

- LEFT-HANDED VERSIONS
- DIRECT THERMAL (no ribbon)
- RIBBON SAVER
- INTERNAL WIRELESS LAN (DMXHNET)
- INTERNAL ETHERNET LAN (DMXNET)
- EXTERNAL ETHERNET LAN (DMX-100)
- INTERNAL TWINAX/COAX INTERFACE
- REMOTE FRONT PANEL DISPLAY
- RFID (Encodes EPC Class 1 tags)
- EXTERNAL KEYBOARD SUPPOR
- BMB FLASH MAIN LOGIC BOARD
- LINERLESS(Special Order)
- INTERNATIONAL LANGUAGE PRINT CAPABILITY (ILPC) consisting of one of the following:
  - > CG-TIMES SCALABLE FONT
  - > KANJI GOTHIC B & E SCALABLE FONTS
  - > SIMPLIFIED CHINESE GB SCALABLE FONT
  - > KOREAN HANGUL SCALABLE FONT
  - > SUPPORTS BIG 5 ENCODING